

## LASER SENSOR

### LS-B10



Thank you for purchasing the TOPCON LS-B10.

For the best performance of the instruments, please read these instructions carefully and keep them in a convenient location for future reference.

#### DISPLAY FOR SAFE USE

In order to encourage the safe use of products and prevent any danger to the operator and others or damage to properties, important warnings are put on the products and inserted in the instruction manuals.

We suggest that everyone understand the meaning of the following displays and icons before reading the "Safety Cautions" and text.

Display	Meaning
 <b>WARNING</b>	Ignoring or disregard of this display may lead to death or serious injury.
 <b>CAUTION</b>	Ignoring or disregard of this display may lead to personal injury or physical damage to the instrument.


- Injury refers to hurt, burn, electric shock, etc.
- Physical damage refers to extensive damage to buildings or equipment and furniture.


#### HANDLING PRECAUTIONS

Guarding the instrument against shock

When transporting the instrument, provide some protection to minimize risk of shock. Heavy shock may affect beam accuracy.

#### SAFETY CAUTIONS

 <b>WARNING</b>
<ul style="list-style-type: none"> <li>• <b>There is a risk of fire, electric shock or physical harm if you attempt to disassemble or repair the instrument yourself.</b> This is only to be carried out by TOPCON or an authorized dealer, only!</li> <li>• <b>Risk of fire or electric shock.</b> Do not use damaged power cable, plug and socket.</li> <li>• <b>Risk of fire or electric shock.</b> Do not use a wet battery.</li> <li>• <b>May ignite explosively.</b> Never use an instrument near flammable gas, liquid matter, and do not use in a coal mine.</li> <li>• <b>Do not hold the LS-B10 magnetic clamp near anyone who uses a pace maker or other electronic medical devices.</b> The strong magnetic field can disrupt the normal operation of such devices.</li> <li>• <b>Battery can cause explosion or injury.</b> Do not dispose in fire or heat.</li> <li>• <b>The short circuit of a battery can cause a fire.</b> Do not short circuit battery when storing it.</li> </ul>

 <b>CAUTION</b>
<ul style="list-style-type: none"> <li>Risk of injury to fingers. Do not place fingers on magnet while mounting to equipment.</li> <li>Strong magnetic field. Do not place LS-B10 magnetic clamp near any sensitive electronic devices or magnetic storage media such as computer disk.</li> <li>Do not allow skin or clothing to come into contact with acid from the batteries, if this does occur then wash off with copious amounts of water and seek medical advice.</li> </ul>



#### EXCEPTIONS FROM RESPONSIBILITY

- 1)The user of this product is expected to follow all operating instructions and make periodic checks of the product's performance.
- 2)The manufacturer, or its representatives, assumes no responsibility for results of a faulty or intentional usage or misuse including any direct, indirect, consequential damage, and loss of profits.
- 3)The manufacturer, or its representatives, assumes no responsibility for consequential damage, and loss of profits by any disaster, (an earthquake, storms, floods etc.).  
A fire, accident, or an act of a third party and/or a usage any other usual conditions.
- 4)The manufacturer, or its representatives, assumes no responsibility for any damage, and loss of profits due to a change of data, loss of data, an interruption of business etc., caused by using the product or an unusable product.
- 5)The manufacturer, or its representatives, assumes no responsibility for any damage, and loss of profits caused by usage except for explained in the user manual.
- 6)The manufacturer, or its representatives, assumes no responsibility for damage caused by wrong movement, or action due to connecting with other products.

#### Standard Set Composition

- 1 LS-B10 Instrument ..... 1pc.
- 2 AA-size dry cells ..... 3pcs.
- 3 Instruction manual ..... 1pc.

#### Nomenclature and Functions

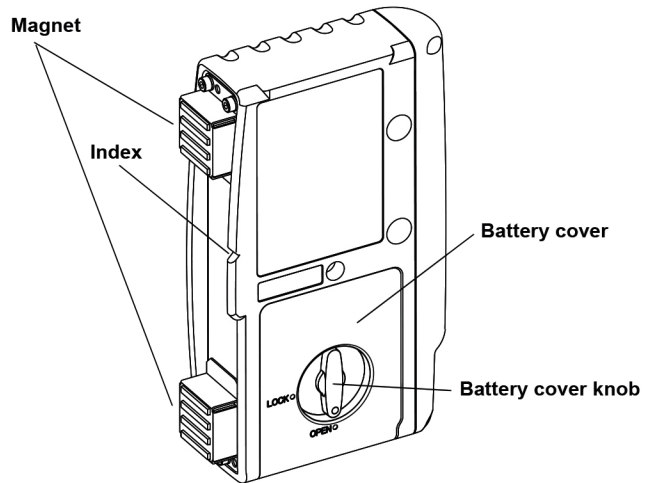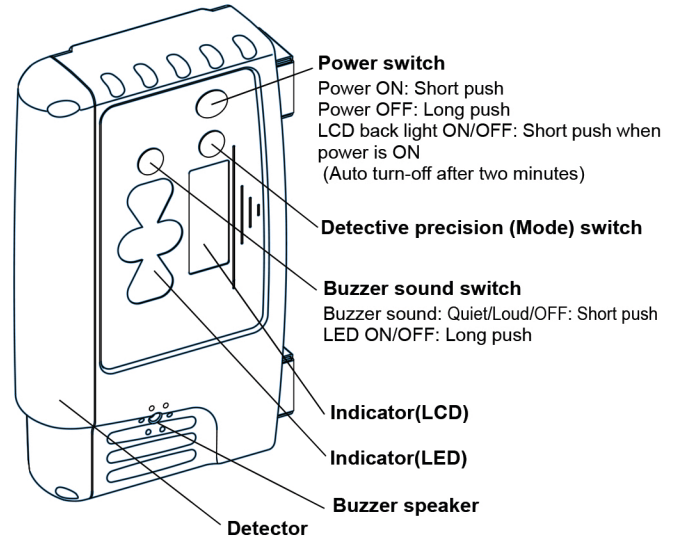


Please refer to the back of the instruction manual for the indicator display patterns.

#### Operation

- 1 Mount the LS-B10 on the equipment and position a rotating laser.
- 2 Raise or lower the machine blade or arm to position the cutting edge or bucket at the desired grade elevation.
- 3 Turn on the LS-B10.
- 4 Keep the machine blade or arm motionless and raise or lower the LS-B10 and adjust until ON-GRADE position are flashing. This is the ON GRADE position. The reference position has been set.
- 5 While operating, use the LED display to continually check grade, moving the blade or cutting / filling according to the direction of the LS-B10 display.

### Height alert warning of rotating laser



A flash and a buzzer sound signifies that the height alert function of rotating laser is operating.  
(This function is not usable to the rotating laser which does not have the height alert and the function to output alarm signal.)



Indicator(LED)  
Flashes slowly

### Rotating laser battery warning

A flash shows that the rotating laser power is low.  
(This function is not usable to the rotating laser which does not have the function to output alarm signal.)

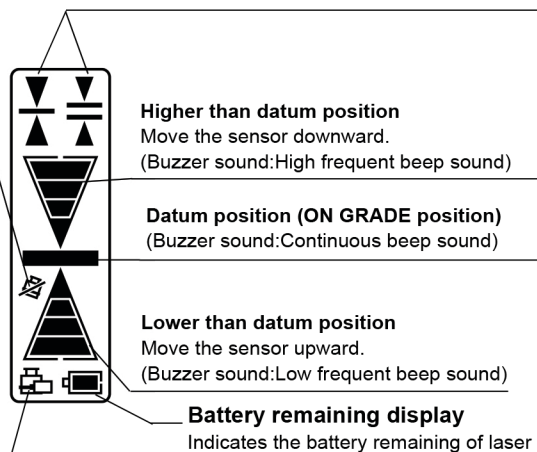

Battery is sufficient.

The power is low, but sensor is still usable.

Dead battery.

Replace the dry battery with new one.

### Power-save function

The instrument turns the power-save mode after detecting no laser beam for more than approx. five minutes.


In the power-save mode, the indicator LCD turns off and one indicator LED blinks green.  
(The mode is canceled automatically when the instrument detects a laser beam again.)

The mode can also be canceled by pressing the power switch again.)

### Auto-cut off function

The power will be turned off automatically after detecting no laser beam for more than approx. 30 minutes. (To turn on the laser sensor, press the power switch again.)

### Precision mode




## Laser beam positions and display patterns

Indicator(LCD)	Indicator(LED)	Detective precision
		Mode1: ±2mm Mode2: ±6mm Mode3: ±12mm Mode4: ±30mm
No display when in Mode 4		±15mm/±0.05ft (30mm/0.1ft width)
No display when in Mode 4		±25mm/±0.08ft (50mm/0.16ft width)
	Flashes quickly	±35mm/±0.11ft (70mm/0.23ft width)
		±60mm/±0.2ft (120mm/0.39ft width)
	Flashes slowly	When the laser beam is off to the top or to the bottom
	Flashes more slowly	

## Specifications

Detective range	: 120mm(4.724inches)
Detective angle	: 270°
Detective precision	: Mode1 : ±2mm(0.0066ft) : Mode2 : ±6mm(0.020ft) : Mode3 : ±12mm(0.039ft) : Mode4 : ±30mm(0.098ft)
Detectable laser wave length	: 633~780nm
Laser detecting range (diameter)	: 700m(2300ft) (Using RL-H1Sa)
Power source	: AA-size dry cells 3pcs.
Continuous operating time (+20°C/+68°F)	: Approximately 100 hours (Using alkaline manganese dry cells)
Operating temperature	: -20°C~+50°C(-4°F~+122°F)
Water proof	: IPX6
Dimensions (W/D/H)	: 110x36x176(mm) (4.3"x1.4"x6.9")
Weight (Without cells)	: 0.53kg (1.2lbs)

Detective angle, Detective precision and Laser detecting range may vary depending on rotating laser being used or atmospheric conditions.



**TOPCON POSITIONING SYSTEMS, INC.**  
7400 National Drive, Livermore, CA 94551, U.S.A.  
Phone: 925-245-8300 Fax: 925-245-8599 www.topcon.com

**TOPCON CALIFORNIA**  
3380 Industrial Blvd, Suite 105, West Sacramento, CA 95691, U.S.A.  
Phone: 916-374-8575 Fax: 916-374-8228

**TOPCON EUROPE POSITIONING B.V.**  
Essebaan 11, 2508 LJ Capelle a/d IJssel, The Netherlands  
Phone: 010-458-5077 Fax: 010-284-4949 www.topcon-europe.com

**IRELAND OFFICE**  
Unit 69 Western Parkway Business Center  
Lower Ballymount Road, Dublin 12, Ireland  
Phone: 01460-0021 Fax: 01460-0129

**TOPCON DEUTSCHLAND G.m.b.H.**  
Gieselerstr. 31, 47677 Mülheim, GERMANY  
Phone: 02154-885-100 Fax: 02154-885-111 info@topcon.de

**TOPCON S.A.R.L.**  
89, Rue de Paris, 92585 Clichy, Cedex, France  
Phone: 33-1-47096480 Fax: 33-1-47092051 topcon@topcon.fr

**TOPCON ESPAÑA S.A.**  
Frederic Mompou 5, ED. Euro 3, 08960, Sant Joan Desvern, Barcelona, Spain  
Phone: 03-473-4027 Fax: 03-473-3032 www.topconesp.com

**TOPCON SCANDINAVIA A.B.**  
Norsgatan 2 S-43151 Mölndal, SWEDEN  
Phone: 031-7190900 Fax: 031-7190249

**TOPCON (GREAT BRITAIN) LTD.**  
Topcon House Kennel Side, Bone Lane, Newbury, Berkshire RG14 5PX U.K.  
Phone: 44-1635-551120 Fax: 44-1635-551170  
survey.sales@topcon.co.uk laser.sales@topcon.co.uk

**TOPCON SOUTH ASIA PTE. LTD.**  
88-102 Pandan Road, #01-01 Pandan Industrial Complex, Singapore 123891  
Phone: 67280222 Fax: 67233540 www.topcon.com.sg

**TOPCON AUSTRALIA PTY. LTD.**  
Unit 15, 4 Avenue of American Newington NSW 2127, Australia  
Phone: 02-8748-8777 Fax: 02-8647-2926 www.topcon.com.au

**TOPCON INSTRUMENTS (THAILAND) CO., LTD.**  
77/102 Siam Satoh Tower, 37th Fl.,  
Kungthoraburi Rd., Klongtoey, Klongsam, Bangkok 10600 Thailand.  
Phone: 02-440-1152-7 Fax: 02-440-1158

**TOPCON KOREA CORPORATION**  
2F Yongsang Bldg., 1095-3, Secho-dong, Seocho-gu, Seoul, 137-876, Korea.  
Phone: 82-2-2655-0321 Fax: 82-2-2655-0319 www.topcon.co.kr

**TOPCON OPTICAL (H.K.) LIMITED**  
2-4F Meaco Industrial Bldg., No. 53-55 Au Pui Wan Street, Fo Tan Road,  
Sha Tin, N.T., Hong Kong  
Phone: 2660-1328 Fax: 2660-2221 www.topcon.com.hk

**TOPCON CORPORATION BEIJING OFFICE**  
Building A No.3 Kangding Street  
Beijing Economic Technological Development Area, Beijing, China 100176  
Phone: 10-6780-2789 Fax: 10-6780-2790

**TOPCON CORPORATION BEIRUT OFFICE**  
P. O. BOX 70-1002 Antelias, BEIRUT LEBANON  
Phone: 961-4-52325961-4-523256 Fax: 961-4-521119

**TOPCON CORPORATION DUBAI OFFICE**  
C/O Atlas Medical FZCO, P. O. Box 54304, C-25, Dubai Airport Free Zone, UAE  
Phone: 971-4-2995900 Fax: 971-4-2995901