SCR20 NEW! PATENT PENDING

20-FT CONSTRUCTION FIBERGLASS GRADE ROD

The SitePro SCR20 grade rod has same features of the SCR-Series (below), but equipped with the NEW ZAMAK™ quick-release buttons.

- Durable **Patent Pending ZAMAK quick-release buttons** made of special metal alloy that is wear resistant and provides smooth adjustments and reliable secure locking
- Special backside measuring scale
- Rectangular shape
- Non-conductive fiberglass is waterproof and corrosion-resistant
- Sections are removable

sku	length	graduations	sections	collapsed	wgt
11-SCR20-C	20-ft	8ths	6	52.38-in (133cm)	7.85lb (3.5kg)
11-SCR20-T	20-ft	10ths	6	52.38-in (133cm))	7.85lb (3.5kg))



SCR-Series include carrying case with carrying strap



ZAMAK QUICK RELEASE BUTTON

New button design provides greater impact resistance, increased durability and optimal operation in a wide variety of temperatures and environments.



SCR-SERIES


CONSTRUCTION FIBERGLASS GRADE ROD

The SitePro SCR-Series leveling rods are constructed of durable corrosion-resistant and non-conductive fiberglass. Lightweight, telescoping rectangular shaped sections with rounded back corners make the SCR-Series leveling rod easier to grip.

Features stand-off ribs on front corners to protect the large, easy-to-read graduated scale from wear. Scales are glare-resistant with formulated coating that protects the scales from wear.

- Reliable, long-lasting spring-loaded Delrin® buttons (#Z11-SCRBUTTON) securely lock sections together, and designed to resist jamming from debris
- Special backside measuring scale allows users to read **direct height measurements** at eye level
- Rectangular shape allows for laser detector clamp to mount to any section of the leveling rod
- Non-conductive fiberglass is waterproof and corrosion-resistant
- Sections are removable for easy cleaning

sku	length	graduations	sections	collapsed	wgt
11-SCR13-C	13-ft	8ths	4	58-in (148cm)	4.5lb (2.0kg)
11-SCR13-T	13-ft	100ths	4	58-in (148cm)	4.5lb (2.0kg)
11-SCR16-C	16-ft	8ths	5	57-in (145cm)	6.2lb (2.8kg)
11-SCR16-T	16-ft	100ths	5	57-in (145cm)	6.2lb (2.8kg)
11-SCR25-C	25-ft	8ths	6	63.5-in (161cm)	10lb (4.5kg)
11-SCR25-T	25-ft	100ths	6	63.5-in (161cm)	10lb (4.5kg)
11-SCR05-M	5m	Metric 'E'	5	57-in (145cm)	6.2lb (2.8kg)

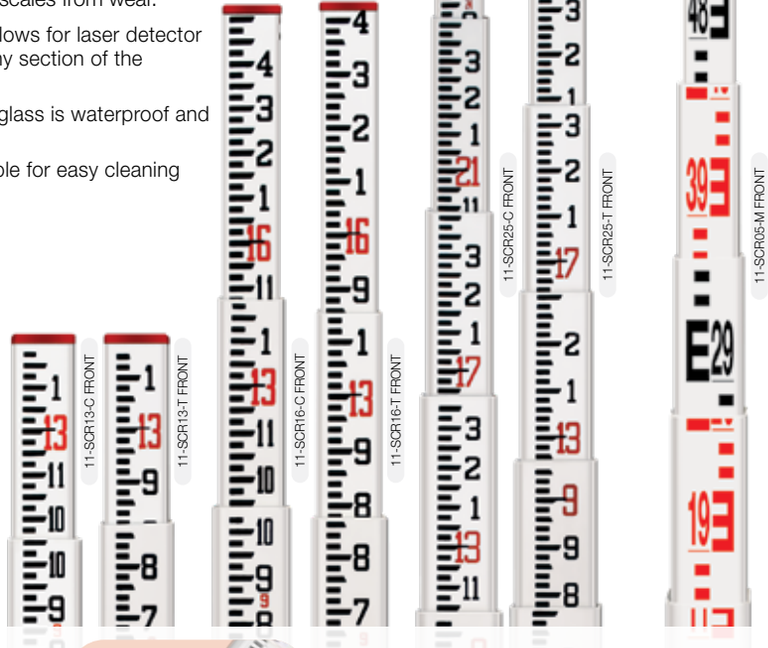



MOUNTING TIP FOR MINI PRISM

Top section of leveling rod has built-in 1/4-20 female thread, ideal for mounting a mini prism.



GRADUATED IMPRINTED BACKSIDE

Special backside measuring scale allows users to read **direct height measurements** at eye level

CONSTRUCTED TOUGH

DURABLE, RIGID FIBERGLASS WITH REINFORCED DESIGN FOR STRENGTH & STABILITY

CONTRACTORS-TOOLS.COM
SURVEY EQUIPMENT AND SUPPLIES
1-877-866-5721
Contractors-Tools.com
SitePro
Authorized SitePro Dealer